




REVERSE VOLTAGE -30 to 100Volts
FORWARD CURRENT -10.0 Amperes

- Metal of silicon rectifier , majority carrier conduction
- Guard ring for transient protection
- Low power loss,high efficiency
- High current capability,low VF
- High surge capacity
- Plastic package has UL flammability classification 94V-0
- For use in low voltage,high frequency inverters,free wheeling and polarity protection applications

- Case: JEDEC R-6 molded plastic
- Polarity: Color band denotes cathode
- Weight: 0.07 ounces , 2.1 grams
- Mounting position: Any

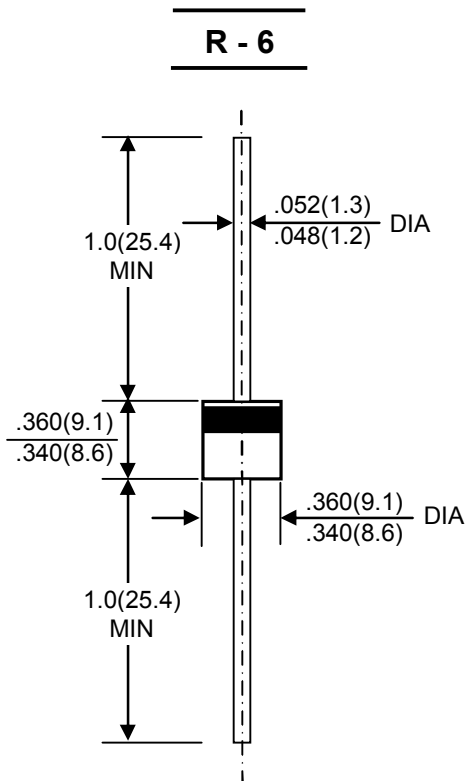

Dimensions in inches and (millimeters)

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave ,60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

[illegible]

NOTES:1.300us Pulse Width, 2%Dudy Cycle.

2.Measured at 1.0 MHZ and applied reverse voltage of 4.0VDC.

3. Thermal Resistance Junction to Case.

RATING AND CHARACTERISTIC CURVES

10SQ030 thru 10SQ100



FIG.1-FORWARD CURRENT DERATING CURVE

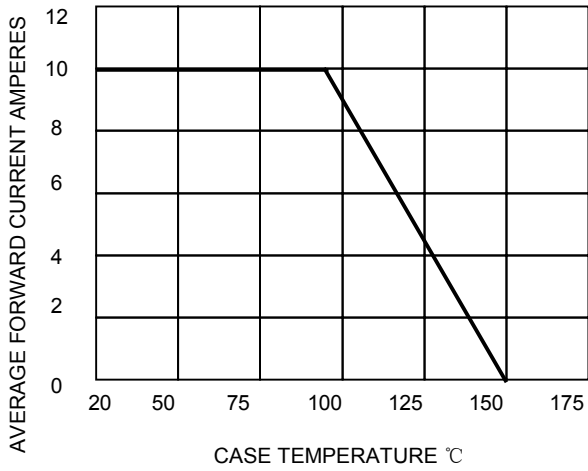


FIG.2-MAXIMUM NON-REPETITIVE SURGE

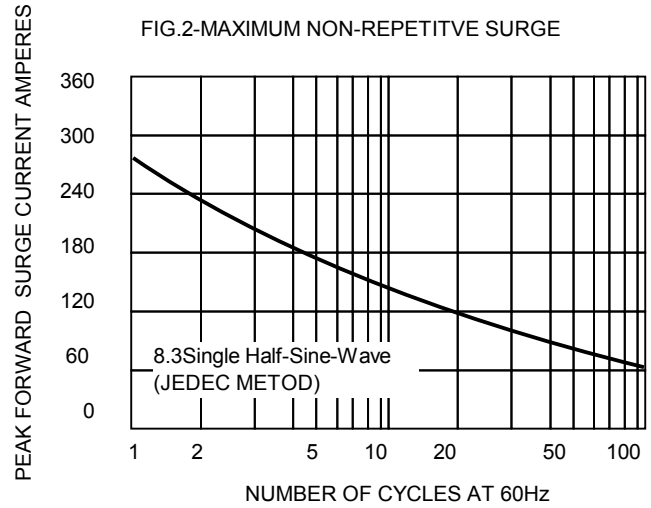


FIG.3-TYPICAL REVERSE CHARACTERISTICS

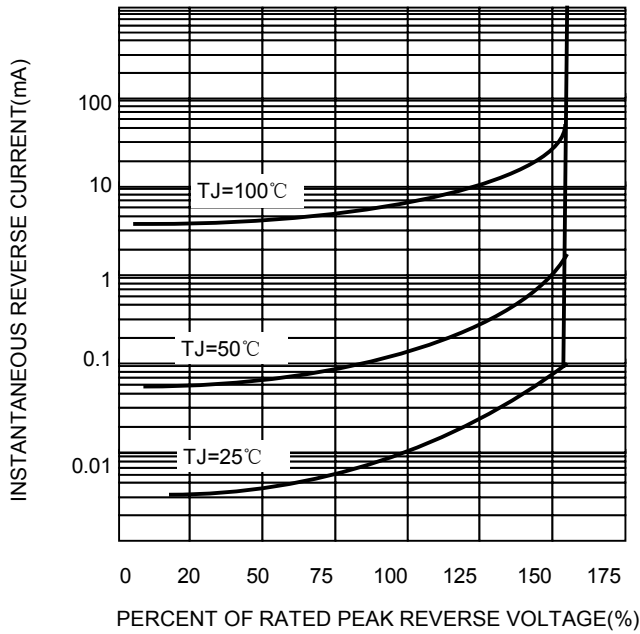


FIG.4-TYPICAL FORWARD CHARACTERISTICS

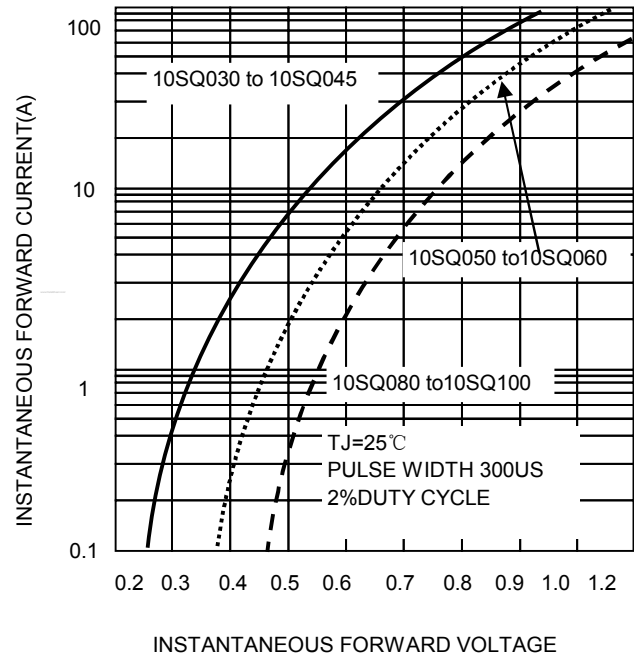


FIG.5-TYPICAL JUNCTION CAPACITANCE

