


Features

- Low Power Loss, High Efficiency
- Low Leakage
- Low Forward Voltage Drop
- High Current Capability
- High Speed Switching
- High Surge Current Rating
- Plastic Material - UL Flammability Classification 94V-0

DISCONTINUED NOT RECOMMENDED
FOR NEW DESIGNS, USE UF3001 - UF3007

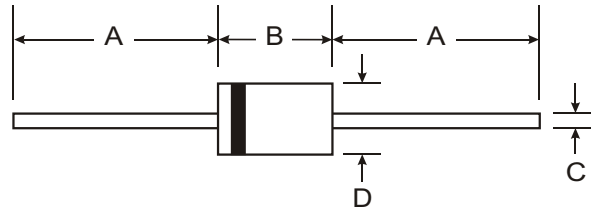

Mechanical Data

Case: Molded Plastic
 Terminals: Plated Axial Leads, Solderable per MIL-STD-202, Method 208
 Polarity: Color Band Denotes Cathode
 Approx. Weight: 1.2 grams

DO-201AD		
Dim	Min	Max
A	25.4	—
B	—	9.5
C	1.2	1.3
D	4.8	5.2
All Dimensions in mm		


Maximum Ratings and Electrical Characteristics

Ratings at 25° C ambient temperature unless otherwise specified.
 Single phase, half wave, 60Hz, resistive or inductive load.


Characteristic	Symbol	HER301	HER302	HER303	HER304	HER305	Unit
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	300	400	V
Maximum RMS Voltage	V_{RMS}	35	70	140	210	280	V
Maximum DC Blocking voltage	V_{DC}	50	100	200	300	400	V
Maximum Average Forward Rectified Current 9.5mm Lead Length @ $T_A=50^{\circ}C$	$I_{(AV)}$	3.0					A
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FM}	125					A
Maximum Instantaneous Forward Voltage at 3.0 A DC	V_F	1.1					V
Maximum DC Reverse Current at Rated DC Blocking Voltage @ $T_A = 25^{\circ}C$	I_R	10					μA
Maximum Full Load Reverse Current Full Cycle Average 9.5mm Lead Length @ $T_C = 55^{\circ}C$	I_R	150					μA
Maximum Reverse Recovery Time (Note 1)	T_{RR}	50					nS
Typical Junction Capacitance (Note 2)	C_J	70					pF
Operating and Storage Temperature Range	T_J, T_{STG}	-65 to +150					$^{\circ}C$

Notes: 1. Reverse Recovery Test Conditions: $I_F = 0.5 A$, $I_R = 1.0 A$, $I_{RR} = 0.25A$
 2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.


**DISCONTINUED NOT RECOMMENDED
FOR NEW DESIGNS, USE UF3001 - UF3007**

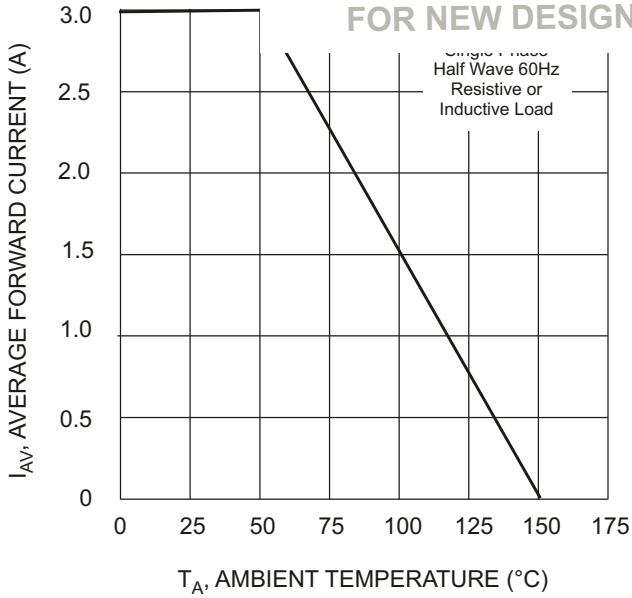


T_A , AMBIENT TEMPERATURE (°C)
Fig. 1, Typical Forward Current Derating Curve

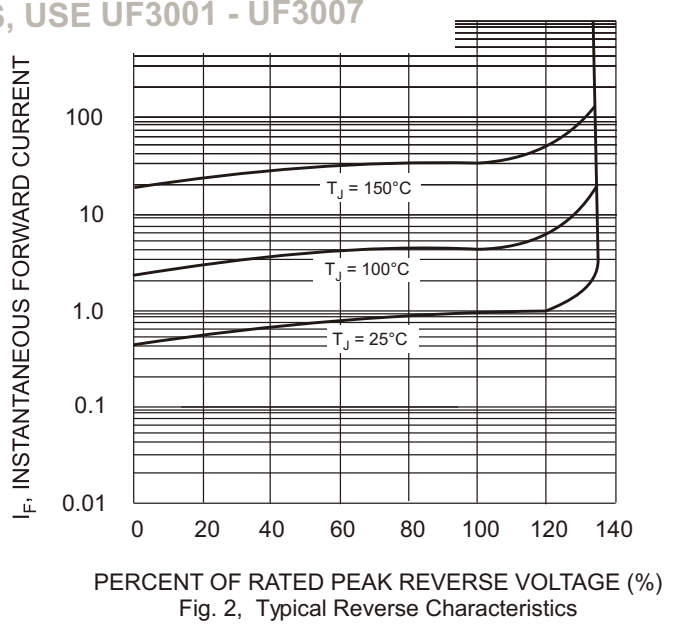


PERCENT OF RATED PEAK REVERSE VOLTAGE (%)
Fig. 2, Typical Reverse Characteristics

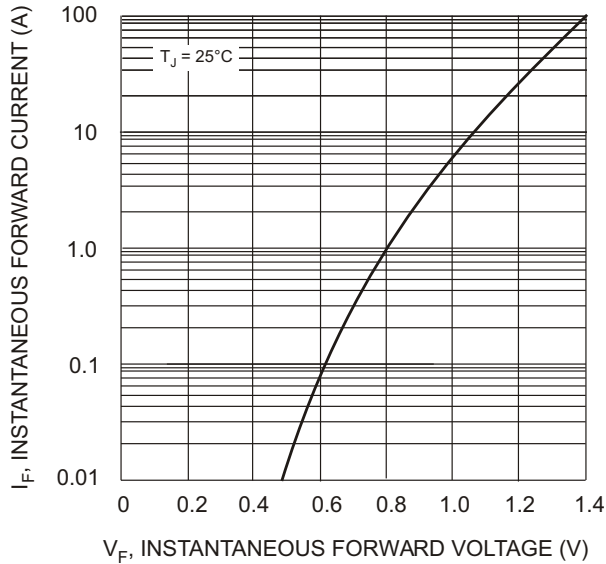

V_F , INSTANTANEOUS FORWARD VOLTAGE (V)
Fig. 3, Typ. Instantaneous Forward Characteristics

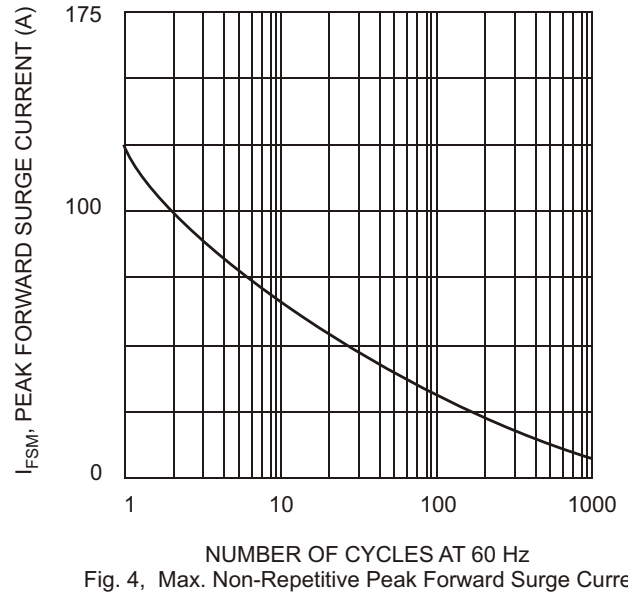

NUMBER OF CYCLES AT 60 Hz
Fig. 4, Max. Non-Repetitive Peak Forward Surge Current

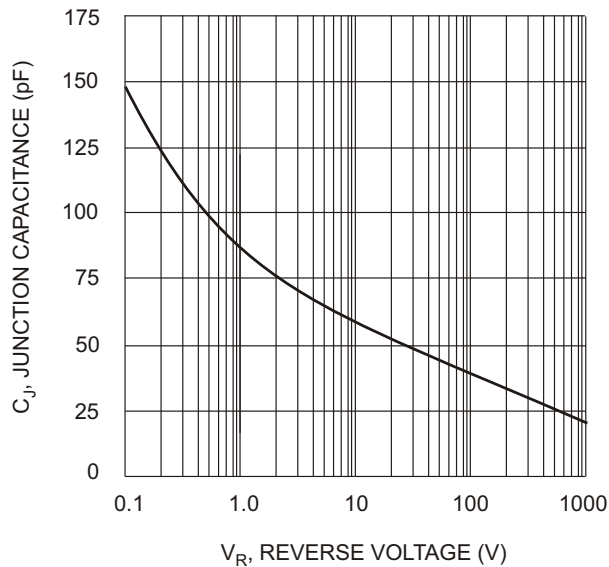

V_R , REVERSE VOLTAGE (V)
Fig. 5, Typical Junction Capacitance

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.

**DISCONTINUED NOT RECOMMENDED
FOR NEW DESIGNS, USE UF3001 - UF3007**