

D-SUB Series

KLS1-215 D-Sub Connector (DR 2 Row Right Angle 8.1mm Type)

Material:

Housing: PBT+30% Glass Fiber (UL94V-0)

Contacts: Brass or Phosphor Bronze

Shell: Steel, 100u" Tin Over 50u" min Nickel

Clinch Nut: Brass, 100u" min Nickel Plated

Screwlock: Brass, 100u" min Nickel Plated

Electrical Characteristics:

Current Rating: 3 AMP / 5AMP

Withstanding Voltage: AC 500V for 1 Minute.






Insulator Resistance: 1000M ohms min. at DC 500V

Contact Resistance: 20M ohms max.

Operating Temperature: -40°C~+105°C



I

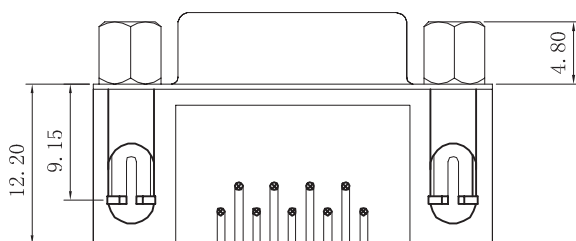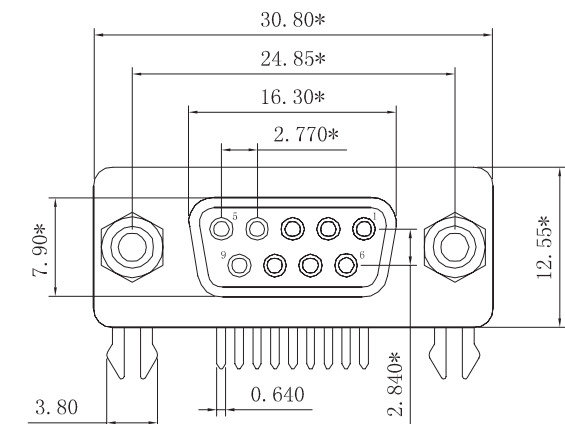

ORDER INFORMATION

Product NO.: KLS1-215-XX-F-L

Pos. NO. ————
Contact Number of Row ————
215=DR Series ————
L=Blue B=Black
M = Male F = Female
Number of Contacts